

# PT xxL Series

**Electric Pedestrian Power Pallet Truck**  
with capacities of 1600/ 2000/ 2500kg

- Ergonomic, Compact and Safe Long Tiller Design
- Reliable and Strong Chassis
- Powerful, Maintenance Free German AC Power Train
- Core Components from Top Quality Brands



## NOBLELIFT CHINA

Add: 528 Changzhou Road, Taihu Sub-district,  
Changxing, Zhejiang 313100 China  
Tel: 86-572-6210817 6210311  
Fax: 86-572-6210777 6128612  
Email: info@noblelift.com  
Http: www.noblelift.com www.noblelift.cn

## NOBLELIFT RUSSIA

ООО «Ноблелифт Рус»  
194292, Санкт-Петербург  
Домостроительная ул. 4А офис 301  
Бизнес-центр «Парнас»  
Тел.: +7-800-700-28-97  
Email: sales@noblelift.com.ru  
Http: www.noblelift.com.ru

## NOBLELIFT EUROPE GMBH

Add: Borsigstrasse 9-93082 Barbing  
Germany  
Tel: +49 9401 607930  
Fax: +49 9401 6079329  
Email: mail@noblelifteurope.com  
Http: www.noblelifteurope.com

## AUTHORIZED DEALER



Official website

**NOBLELIFT**  
Material Handling

We promise,  
We deliver

# PT xxL Series

ISO9001 / ISO14001  
//2019.02

## Electric Pedestrian Power Pallet Truck

1600-2500kg

NEW!

### INTRODUCTION

The PT16L- 25L series is the first choice for truck loading and unloading as well for universal transportation on short distances with capacities from 1600kg up to 2500kg.

With the short chassis length (PT 16L) the truck is tailored to operate in confined areas.

With its high- quality and state of the art top-brand components and technologies, the truck competes with leading well-known brands in the market.

NEW / Noblelift Products  
ARRIVAL





### Robust and reliable design

The robust chassis with the strong 8mm thick apron protects the truck and the components against mechanical impacts from the outside.

In combination with the strong metal battery cover, the truck is well- equipped to reduce service work and damages to a minimum.

Dirty floor environments have less influence to the vertical AC motor design as the components and the brake are out of the reach of direct impacts. IP 54 protected controller, safe against dust and splash water.

### German AC drive technology

The powerful German Schabmueller maintenance free AC Drive motor in combination with the German Kordel gearbox, Intorqe brake and Wicke drive wheel give best performance, efficiency and reliability to reduce the running costs!

Whatever desired, the AC Drive gives always the right response: gentle or fast acceleration.



### CANBUS technology

The CANBUS technology is due to less wiring more reliable. For maintenance the CANBUS technology makes analysis and adjustments easier so that the downtime is lower than for trucks without CANBUS. Digital signals further makes parts longer lasting than analogue signals.

**CAN-BUS**

### Maintenance friendly



The trucks design and the used components are tailored to make service and maintenance easy. All components are easy to reach when removing the main cover only with 2 screws, drive- and castor wheel are easy to exchange without craning the truck.

**PT 25L**

### Various options

- Load backrest
- Sideways battery exchange
- Different fork-versions on request

Entry rollers as standard.





Ttype sheet for industrial truck acc. to VDI 2198 1KG~2.2LB 1INCH~25.4MM

Distinguishing mark	1.2	Manufacturer's type designation		PT 16L	PT 20L	PT25L
	1.3	Power (battery ,diesel, petrol, gas, manual)			Battery	
	1.4	Operator type			Pedestrian	
	1.5	Load Capacity / rated load	Q(t)	1.6	2.0	2.5
	1.6	Load centre distance	c(mm)		600	
	1.8	Load distance ,centre of drive axle to fork	x(mm)		892	
Weight	1.9	Wheelbase	Y(mm)	1261	1327	1541
	2.1	Service weight	kg	445	535	720
	2.2	Axle loading, laden front/rear	kg	715/1330	855/1680	1040/2200
	2.3	Axle loading, unladen front/rear	kg	345/100	415/120	540/200
Tires, chassis	3.1	Tires		Polyurethane (PU)		
	3.2	Tire size, front	Øx w (mm)		Ø230×70	
	3.3	Tire size, rear	Øx w (mm)		Ø84×84	
	3.4	Additional wheels(dimensions)	Øx w (mm)		Ø100×40	
	3.5	Wheels, number front/rear(x=driven wheels)			1x+2/4	
	3.6	Track, front	b10mm		510	
	3.7	Track, rear	b11 (mm)		367/512	
Dimensions	4.4	Lift height	h3 (mm)		125	
	4.9	Height of tiller in drive position min./ max.	h14mm		800/1335	
	4.15	Height, lowered t	h13mm		85	
	4.19	Overall length	l1mm	1670	1735	1950
	4.20	Length to face of forks	l2mm	520	595	810
	4.21	Overall width	b1mm		729	
	4.22	Fork dimensions	s/e/l (mm)		60/173/1150	
	4.25	Distance between fork-arms	b5 (mm)		540/685	
	4.32	Ground clearance, centre of wheelbase	m2mm		25	
	4.33	Aisle width for pallets 1000X1200 crossways	Ast (mm)	1885	1955	2175
	4.34	Aisle width for pallets 800X1200 lengthways	Ast (mm)	1935	2005	2225
Performance	4.35	Turning radius	Wa (mm)	1440	1490	1750
	5.1	Travel speed, laden/ unladen	km/h	5.7/6.0		
	5.2	Lift speed, laden/ unladen	m/s	0.025/0.035	0.022/0.030	0.035/0.045
	5.3	Lowering speed, laden/ unladen	m/s	0.035/0.030	0.035/0.035	0.040/0.040
	5.8	Max. gradeability, laden/ unladen	%	8/15		
Motors	5.10	Service brake		Electromagnetic		
	6.1	Drive motor rating S2 60min	kW	1.3		1.7
	6.2	Lift motor rating at S3 4.5%	kW	0.8		2.2
	6.3	Battery acc. to DIN 43531/35/36 A, B, C, no		2VBS	2PzS	3PzS
	6.4	Battery voltage, nominal capacity K5	V/Ah	160	210	350
	6.5	Battery weight (minimum)	kg	150	215	285
	6.6	Energy consumption acc: to VDI cycle	KWh/h	0.44	0.39	0.92
	8.1	Type of drive control		AC-Speed Control		
	8.4	Sound level at driver's ear acc. to EN 12053	dB(A)	67	69	65



### Long lasting battery capacities

With the PT-L series for every application the right battery:

- PT 16L with 105 Ah 2VBS battery with very short truck length and maneuverability for restricted operating areas.
- PT 20L with 210 Ah DIN 2PzS battery
- PT 25L with 350 AH DIN 3PzS battery and as standard with sideways battery exchange for long operations and multi- shifts.



Optional sideways battery exchange compartment for PT20L with 20 Ah battery.



### Long tiller design for ergonomics and safety

In particular through the long tiller design the operator can always keep a safe distance to the truck during proceeding the work very ergonomically. The design ensures lower operational forces than trucks with a short tiller. The tillers operating height is naturally positioned to ergonomic, operator friendly controlling positions.

## PT 16/20L

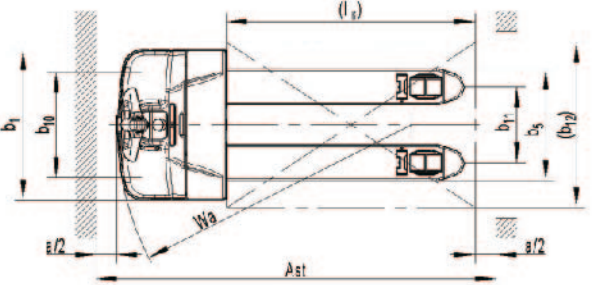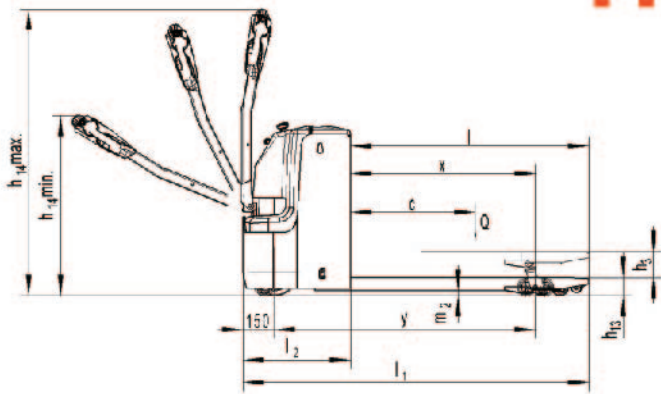

## PT 25L

